

LANDA[®]
CLEANING SYSTEMS

Since 1969

Industrial Pressure Washers and Parts Washers
...Built Right to Do the Job Right

VNG

Stationary, Natural Gas-Heated, Hot Water
Pressure Washer with Multiple-Gun Option

- Up to 10 GPM, 3000 PSI
- Belt-Drive Landa Pump with 7-Year Warranty
- Schedule 80 Coil
- Optional Remote Stations
- LP Conversion Option



▲ Industrial-strength **Motor** and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; notched, heat-reducing, "V" cogged belts connect the motor to the rugged **Landa High-Pressure Pump** with three ceramic plungers, a forged brass head and a unique design that results in lower RPM than comparable pumps for less maintenance and a longer life. The Landa Pump also is backed by a 7-year warranty.

■ Brass, anti-syphon **Detergent Metering Valve** locks out air and dispenses precise amount of cleaning agent.

■ Four quick-couple **Nozzles** are made of hardened stainless steel and mounted for ready access.

■ Industrial grade overload protected **Control Switches** provide years of reliable performance.

■ **Consolidated Plumbing** means both the water supply inlet and the quick-couple, high-pressure outlet are next to each other for ease of installation.

■ Extra-durable **Heating Coil** made of leak-free, cold-rolled, Schedule 80 steel pipe with five-year warranty.

■ Rugged **Steel Cabinet**, with vented panels, is painted with an epoxy powder-coat finish for all-weather protection.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for owner and operator protection.

■ **Electronic Ignition** comes standard eliminating the hassle of having to constantly light the pilot flame.



▲ Reliable **Modulating Thermostat** (6-8 GPM models) adjusts flow of natural gas so water temperature doesn't fluctuate during multiple-gun operation.



NEW!
MODULATING THERMOSTAT
IN 6-8 GPM MODELS



■ Rust-free, polyethylene **Float Tank** with stainless steel inlet filter and low-turbulence float valve allows for high-pressure application of detergent.

■ Industrial-duty **Electric Motor** with multiple voltage options and thermal overload protection.

■ Many **Safety Features**, including a rupture disk and thermal pump protector to prevent the build up of excessive pressures or heat.

■ Insulated, fatigue-free **Trigger Gun** with stainless steel, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.

■ Top-of-the-line **Tuff-Skin Hose** has 24-inch hose guard for burst protection and seven times the abrasion resistance as other high-pressure hoses; **Swivel Crimp Fitting** for ease in attaching the gun.

www.landa.com

VNG

Stationary, Natural Gas-Heated, Hot Water Pressure Washer with Multiple-Gun Option


- Up to 10 GPM, 3000 PSI
- Belt-Drive Landa Pump with 7-Year Warranty
- Schedule 80 Coil
- Optional Remote Stations
- LP Conversion Option



WHY CHOOSE LANDA'S VNG

In 1987 Landa built the first VNG, which has since become the industry standard for natural gas heated hot water pressure washers. Housed in an attractive, but sturdy, metal cabinet with quick access control panel and industrial-duty components throughout, the VNG is flexible enough to support up to four optional remote wash stations. It is especially known for:

QUALITY and SAFETY: The VNG is loaded with quality and safety features. Besides being certified to the rigid UL-1776 safety standards, the VNG is manufactured in a state-of-the-art plant certified to ISO-9001 quality manufacturing procedures. Standard features, not often found on other brands, include time delay shutdown, electronic ignition, steam combination, stainless steel variable pressure wand, and pressure gauge.

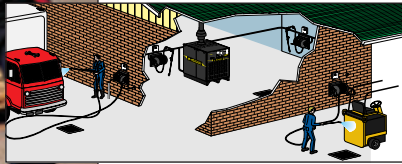

VNG can support up to 4 work stations

EFFICIENT: The VNG's super-efficient burner has an energy-efficient, vertical, Schedule 80 heating coil and, for 6-8 GPM models, a modulating thermostat to regulate the gas flow in multi-gun operations.

VNG Specifications

Part No.	GPM	PSI	Voltage	Amps	HP	Pump	Pump RPM	BTU	LxWxH	SHIP WT.
VNG4-20024A	4	2200	230V 1ph	27	6.2	Belt Drive	930	400,000	45"x36"x48"	1,010 lbs.
VNG4-20024B	4	2200	230V 3ph	15	6.2	Belt Drive	930	400,000	45"x36"x48"	990 lbs.
VNG4-20024C	4	2200	460V 3ph	8	6.2	Belt Drive	930	400,000	45"x36"x48"	990 lbs.
VNG4-30024A	3.9	3000	230V 1ph	36	8.2	Belt Drive	775	400,000	45"x36"x48"	1,030 lbs.
VNG4-30024B	3.9	3000	230V 3ph	25	8.2	Belt Drive	775	400,000	45"x36"x48"	1,030 lbs.
VNG4-30024C	3.9	3000	460V 3ph	15	8.2	Belt Drive	775	400,000	45"x36"x48"	1,030 lbs.
VNG6-30024B	6	3000	230V 3ph	39	15	Belt Drive	1525	600,000	70"x43"x57"	1,830 lbs.
VNG6-30024C	6	3000	460V 3ph	19	15	Belt Drive	1525	600,000	70"x43"x57"	1,830 lbs.
VNG8-30024B	8	3000	230V 3ph	52	20	Belt Drive	1370	750,000	70"x43"x57"	1,845 lbs.
VNG8-30024C	8	3000	460V 3ph	26	20	Belt Drive	1370	750,000	70"x43"x57"	1,845 lbs.
VNG10-20024B	10	2000	230V 3ph	46	20	Belt Drive	1630	950,000	70"x43"x57"	1,925 lbs.
VNG10-20024C	10	2000	460V 3ph	23	20	Belt Drive	1630	950,000	70"x43"x57"	1,925 lbs.

Additional models also available with 208V and/or 575V

Note: We are constantly improving and updating our products. Consequently, pictures, features, and specifications in this brochure may differ slightly from current models. Flow rates and pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ±5% of listed specifications.

OPTIONS: (SEE YOUR LANDA DEALER FOR A COMPLETE LIST OF OPTIONS)

Description

- LP Gas Conversion Kit (for models up to 4 GPM)
- LP Gas Conversion Kit (for models over 4 GPM)
- Automatic Start / Stop (replaces Time-Delay Shutdown)
- Remote Operating Stations (up to 4 stations)